

# CATWALK LAYDOWN MACHINE

## Features and Benefits

Pipe kickers on both sides can load and unload from either side of the catwalk.

No crane required for installation and removal on land rig since the machine has a winch to get on and off of the catwalk.

Machine has remote length adjustment to adjust to different tubular lengths while working.


No cables or poles are required to operate this machine.

No rig space is taken by machine so work can continue on the rig floor during installation and removal.

Machine can be remotely controlled from the rig floor to provide view of entire machine by the operator.



Catwalk Laydown Machine Extended

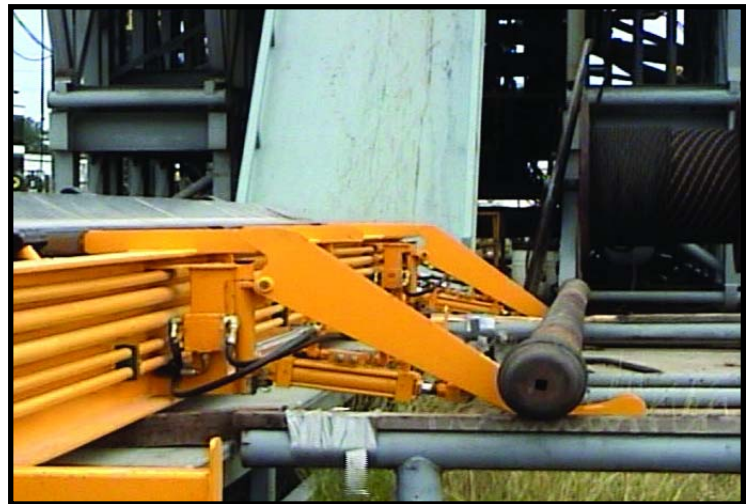

Arms of the Catwalk Laydown Machine