


POWER UNITS

Built Tough to Perform in All Global Environments

Frank's two-stage hydraulic power units are self-contained, high-low circuit units designed for use with Frank's Tough power tongs. An air cooled Deutz diesel engine and optional oil cooler make Frank's power units dependable performers. These units are designed to make optimum use of engine horsepower to deliver high volume and high pressure. A cage and skid protect the unit and facilitate handling.

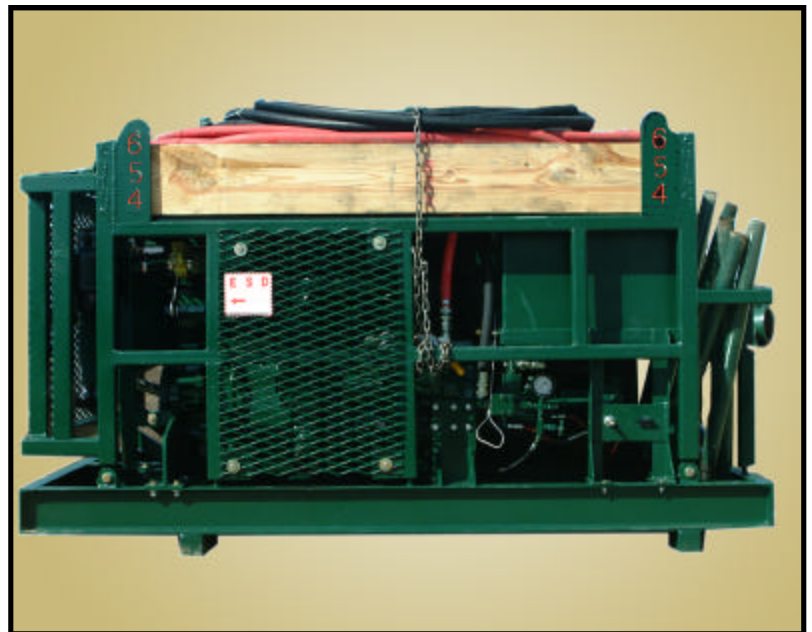

Dimensions & Specifications

Weight:	5000 lbs.
Pump	Two stage vane pump
Starter	Pneumatic Vane
High Volume Flow	75 GPM
High Volume Pressure Max	1500 PSI
Low Volume Flow	37GPM
Low Volume Pressure Max	3000PSI
Oil Cooler (Optional)	Frank's Heat Exchanger